

Roadside maintenance is fundamental to a safe and prosperous community. Concord's under tailgate cross-conveyor berming machine's versatile design will help you shoulder it.

# CONCORD

ROAD EQUIPMENT, MFG.

[www.concordroadequipment.com](http://www.concordroadequipment.com)

(800)942-ROAD (7623)

(440)357-5344

## CRE-960-18SL

### SELF-LEVELING MOUNTING KIT

Includes full width saddle support that keeps all weight between pivot points, allowing even distribution of loads.

## CRE-960-18FL

### FOLDING LEG & WINCH MOUNTING KIT

Allows user to move machine from one vehicle to another at the job site, without tools, in just minutes.

**CONCORD**  
ROAD EQUIPMENT, MFG.

348 CHESTER STREET,  
PAINESVILLE, OHIO 44077

**PROUDLY**  
MANUFACTURED IN THE  
UNITED STATES

Concord Road Equipment, Mfg. reserves the right to change, alter, or otherwise redesign the base unit and options. Your model may vary from these pictures.


For more information, contact: [sales@concordroadequipment.com](mailto:sales@concordroadequipment.com)

UNDER TAILGATE CROSS CONVEYOR  
BERMING MACHINE



# CRE-960 UNDER TAILGATE CROSS CONVEYOR BERMING MACHINE


Concord's line of Berming Machines & Accessories are powerfully versatile. Whether it's berming road shoulders, building curbs, patching asphalt, filling sand bags, backfilling trenches, repairing washout damage, or spreading ice control materials, the CRE-960 does it all.

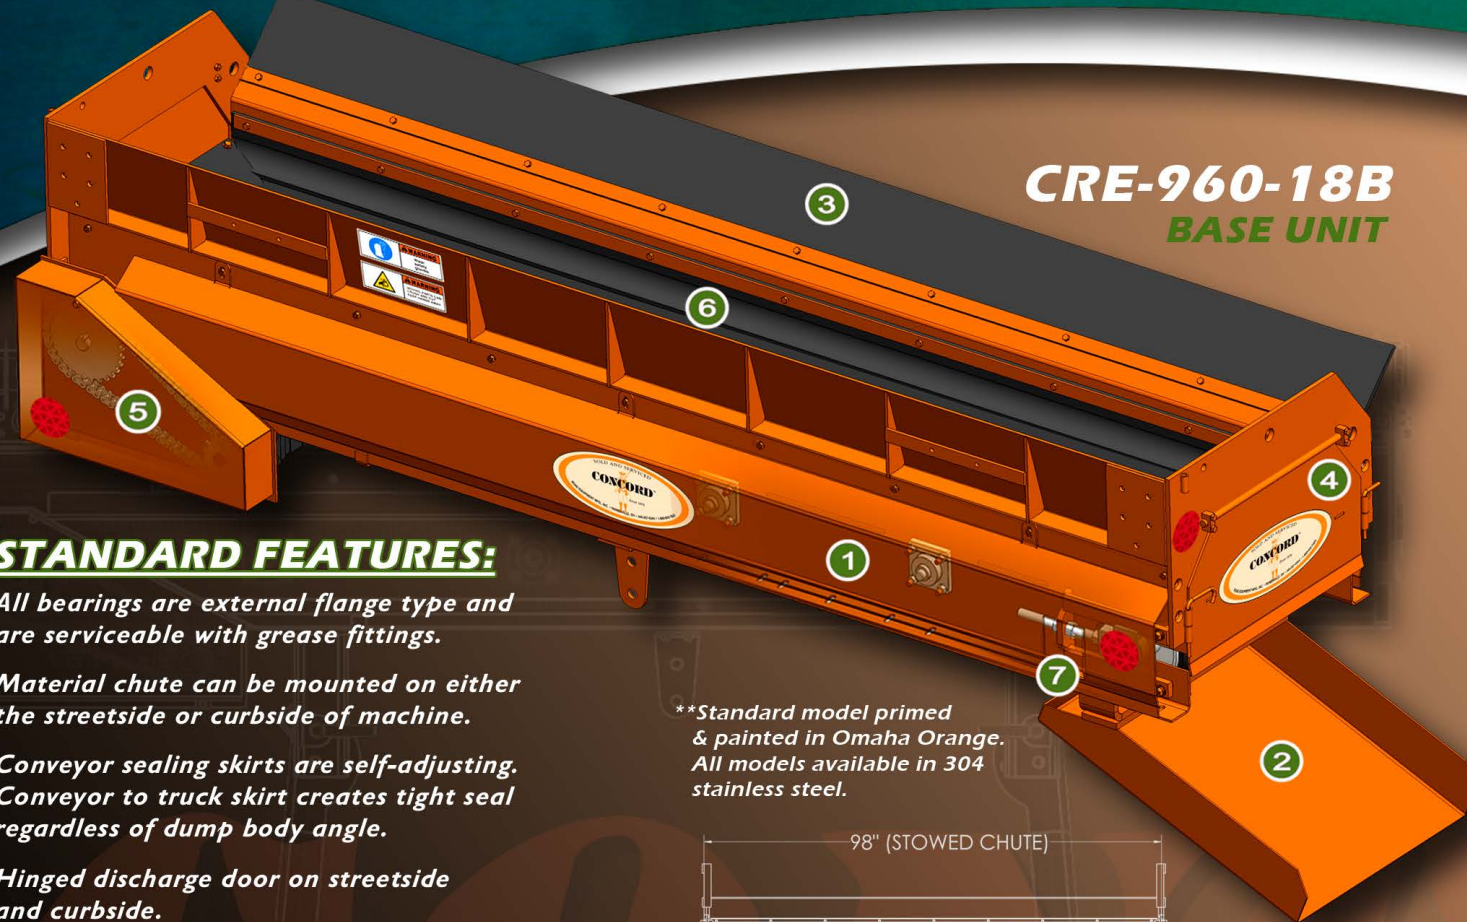

## STANDARD FEATURES:

- ① All bearings are external flange type and are serviceable with grease fittings.
- ② Material chute can be mounted on either the streetside or curbside of machine.
- ③ Conveyor sealing skirts are self-adjusting. Conveyor to truck skirt creates tight seal regardless of dump body angle.
- ④ Hinged discharge door on streetside and curbside.
- ⑤ All external flange bearings and shaft ends are protected by easily removable access covers.
- ⑥ Direction of belt reverses on-the-go, courtesy of standard quick-disconnect fittings.
- ⑦ Take-up bearings allow safe and easy adjustment and belt tracking.

\*\*Standard model primed & painted in Omaha Orange. All models available in 304 stainless steel.

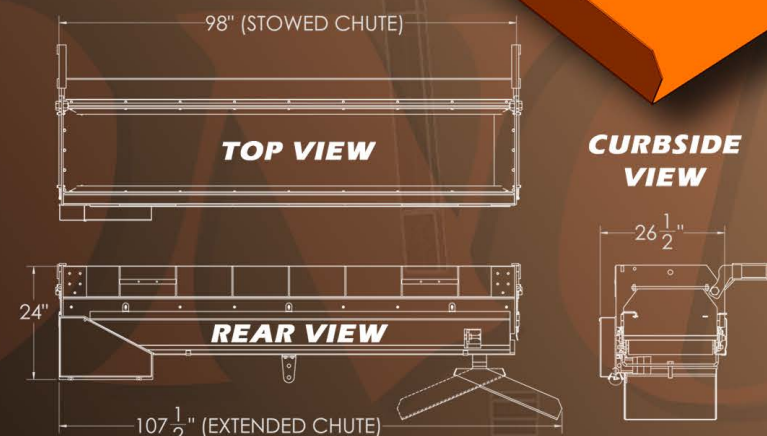

## OPTIONS & ATTACHMENTS:

The 960's exceptional design and construction offers the user a wide array of optional attachments allowing your crew to bolt and go.

- ① **CRE-960-18BG**  
12" back guard extension. (Standard 7")
- ② **CRE-960-18LG**  
Stop-tail-turn LED & 3-Light LED cluster recessed into rear cover. (Vehicle must be equipped with a trailer lighting receptacle).
- ③ **CRE-960-18SP**  
Adjustable material spinner/sander assembly with deflector & 18" steel disk (Polydisk also available).
- ④ **CRE-960-18AU**  
60" adjustable auger extension, allowing material to be conveyed at an incline for general purpose fill.
- ⑤ **CRE-960-18SL**  
Self-Leveling mounting system, includes upper pivot arms and lower pivot structure to keep machine level through various body angles (see back page for details).

- ⑥ **CRE-960-18HP**  
Self-contained portable hydraulic power pack, includes electric start gasoline powered engine, direct mount hydraulic pump & reservoir, flow control valve and return line filter assembly on a removable platform. Hydraulic circuit can be used to power external tools.
- ⑦ **CRE-960-18EX**  
48" fold up conveyor extension, extends material drop point approximately 4ft. Standard curbside mount.
- ⑧ **CRE-960-18CD**  
Manually adjustable discharge door.
- ⑨ **CRE-960-18FL**  
Folding leg and winch mounting system, includes folding legs for storage and transfer between units, winch leveling system, and chain mounting components (see back page for details).

